


# 1U Rack Mount Server Rackmount

Configuration Number: BASE CONFIG  
SL-1U-MCX-C622SPW-LK

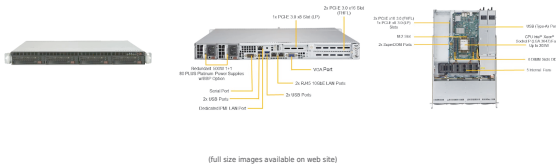

## Type:

- 1U Rack Mount Server
- Depth: 25.60"

## Motherboard:

- Featuring Intel C622 Chipset and Intel Xeon Scalable Processors processor
- **Full Height Slots:**
  - 2 - PCIe x16
  - 1 - PCIe x8
- **LAN:** 2x Ports (10GbE)
- **RAID:** 0,1,5,10 via LSI MegaRAID
- **Video:** VGA
- **Audio:** No Onboard Audio
- **Ports:**
  - 7x USB 2.0 Ports ( 2 Rear, 5 Internal Headers )
  - 4x USB 3.2 Gen 1 Ports ( 2 Rear, 2 Internal Headers )
  - 2x COM Ports (1 RS232 Rear, 1 RS232 Internal Headers)
- See specifications for more ports
- **Operating Temperature:** 10°C to 35°C (50°F to 95°F)

## Configuration summary:

- **Processor:** Xeon Bronze 3104 - 1.70GHz Six Core Intel Processor - 8.25MB Cache (85W)
- **Memory:** 8GB DDR4 2666MHz ECC Registered RAM
- **Hard Drive:** 250GB NVMe SSD M.2 2.9GB/1.3GB - Samsung 980
- **Power Supply:** 500W Redundant Power Supplies with PMBus, 80+ Platinum Certified

- **Operating System:** Not Included -
- **Warranty:** One-Year Depot Warranty

# Technical Specifications

## MotherBoard Specifications:

### Motherboard Model

- Motherboard Type: Proprietary

### Supported CPU

- Number of Processors: 1
- Processor Type: Intel Xeon Scalable Processors

### Chipset

- Chipset: Intel C622 Chipset

### Memory

- Memory Type: DDR4 2666MHz ECCR
- Memory Type: ECC Registered
- DIMMS: 6
- Maximum Memory: 192GB

### On Board Audio

- Audio Type: No Onboard Audio

### On Board Video

- Video Chipset: ASPEED AST2500 BMC
- Video on IO: VGA
- VGA Port Out: 1

### LAN

- LAN Ports: 2
- LAN Type: 10GbE
- LAN Chipset: Intel X722
- Second LAN Chipset: Intel X557
- Wireless LAN: No Integrated WLAN

### Drive Interface

- SATA III Ports (6GB): 10
- RAID
- RAID Levels Supported on Motherboard: 0, 1, 5, 10

### M.2 Slot Specs

- Total M.2 NVMe SSD Slots: 1
- M.2 Slot #1 Specs
- M.2 SATA SSD
- PCIe Signal
- 22110 - 22 mm x 110 mm.

## Chassis Specifications:

### General

- Form Factor: 1U Rackmount
- Color: Black & Silver
- Material: Steel & Plastic
- Material Thickness: 1mm
- Redundant Power Supply Capable
- Slide Rails: Included

### Expansion

- Full Height Slots: 2
- Low Profile Slots: 1
- 3.5" Hot Swap Bays: 4

### Cooling System

- Maximum Fan Count: 7
- Included Fans: 5

### Physical

- Depth: 25.60"
- Depth (Inches): 25.5
- Width: 17.20"
- Height: 1.70"
- Shipping Box - Depth: 33.70"
- Shipping Box - Width: 23.50"
- Shipping Box - Height: 8.50"
- Shipping Weight: 50lbs

### Power

- Built-in Chassis Power Supply: 500W Redundant Power Supplies with PMBus, 80+ Platinum Certified

### Other Features

- Features:  
**Included Rail set, quick/quick, optional for 1U 17.2**

- 2280 - 22 mm x 80 mm.

#### **Rear IO**

- USB 2.0 Ports (on IO): 2
- USB 3.2 Gen 1 Type A Ports (on IO): 2
- Serial (Rear IO): 1

#### **Headers**

- USB 2.0 Ports (on Headers): 5
- USB 3.2 Gen 1 Ports (on Headers): 2
- Serial (via Headers): 1
- FAN Connectors: 7
- Chassis Intrusion

#### **Management Features**

- NMI
- Watch Dog
- TPM Support: Via 2.0 Header

#### **Environmental**

- Operating Temperature: 10°C to 35°C (50°F to 95°F )
- High Humidity: 90%
- Low Humidity: 8%

#### **Operating System Support**

- Windows 10 Pro (64-Bit)
- Windows 10 Pro WS (64-Bit)
- Windows 10 IoT Ent 2019 LTSC
- SL-Windows 11PRO to 10PRO 64bit
- Ubuntu Server Edition
- Windows Server 2012
- Windows Server 2016 STD
- Windows Server 2019 Std
- RED HAT Enterprise LINUX SERVER BASIC
- RED HAT Enterprise LINUX WORKSTATION STANDARD
- RED HAT Enterprise LINUX SERVER STANDARD

#### **Compliance of Component**

- CE
- RoHS
- FCC

#### **Warranty of Component**

- Motherboard Warranty: 1 Year

#### **Other Features**

- Other Features:  
PCI-Express
  - 2 PCI-E 3.0 x16 (FHFL) slots
  - 1 PCI-E 3.0 x8 (LP) slot



Simplifying Computing™

[www.superlogics.com](http://www.superlogics.com)  
Phone: 1-508-650-9500

[sales@superlogics.com](mailto:sales@superlogics.com)  
Fax: 1-508-650-9525